


## ANY JOB. ANY SIZE. ANY PLACE.


### Wall Cavity Nozzles & Spray Tips

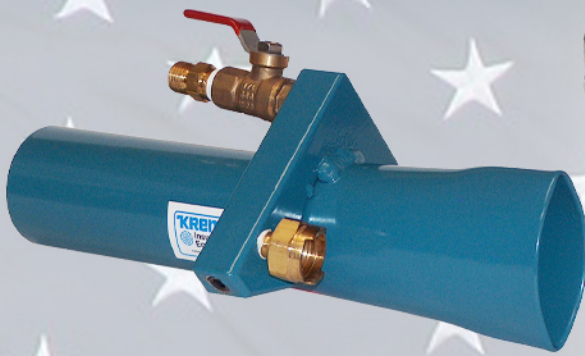

The wall cavity nozzle has a wide oval discharge throat allowing for the maximum flow of coarse, wet, recycled fibers without plugging. Rigid attachment of the spray tip body to internally machined head eliminates misalignment and nuisance pressure tubing leaks caused by frequent accidental impacts. The turn-lock tips offer quick change features.

Available in 2" (5.1cm), 2.5" (6.4cm) or 3" (7.6cm) diameter connection for insulation supply hose.

### Commercial Nozzles & Spray Tips

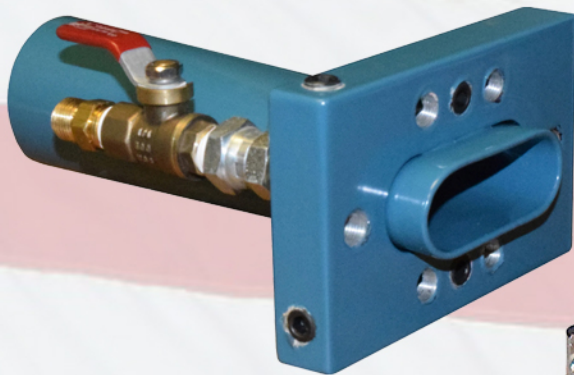

The commercial nozzle has a narrow, flat orifice to increase the dispersing, velocity and impact of fiber. This will maintain a flat, smooth flowing spray pattern which will fully encapsulate the fibers.

Available in 2" (5.1cm) or 2.5" (6.4cm) diameter connection for insulation supply hose.

*\*Tips sold separately*

# AMERICAN MADE.

Backed by a manufacturer's 2-YEAR WARRANTY

## Wall Cavity Nozzles & Spray Tips

Tips available in brass and stainless steel

**Features:** All-aluminum internally machined spray head  
Quick-jet brass spray tips for fast insertion and removal  
3/8" (9.5mm) hose connection with shut-off ball valve for liquid supply hose  
Spray tips sold separately and available upon request

**Weight:** 2" (5.1cm) nozzle: 1.4lbs (.6kg)  
2.5" (6.4cm) nozzle: 2.1lbs (1.0kg)  
3" (7.6cm) nozzle: 2.8lbs (1.2kg)

QVVA2501: .026 opening 25° angle  
QVVA25015: .031 opening 25° angle  
QVVA2502: .036 opening 25° angle  
QVVA2503: .043 opening 25° angle  
QVVA4002: .036 opening 40° angle

## Commercial Nozzles & Spray Tips

Tips available in stainless steel

**Features:** All-aluminum internally machined spray head  
2, 4, 6 or 8 jet  
3/8" (9.5mm) hose connection with shut-off ball valve for liquid adhesive supply hose  
Spray tips sold separately and available upon request

**Weight:** 2" (5.1cm) nozzle: 1.4lbs (.6kg)  
2.5" (6.4cm) nozzle: 1.6lbs (.7kg)

SS4001: .026 opening 40° angle  
SS40015: .031 opening 40° angle  
SS4002: .036 opening 40° angle

ADDITIONAL ACCESSORY OPTIONS AVAILABLE UPON REQUEST